

## Low noise low drop voltage regulator with shutdown function

### Features

- Output current up to 200 mA
- Low dropout voltage (500 mV max at  $I_{OUT} = 200$  mA)
- Very low quiescent current: 0.1  $\mu$ A in OFF mode and max 250  $\mu$ A in ON mode at  $I_{OUT} = 0$  mA
- Low output noise: typ. 30  $\mu$ V at  $I_{OUT} = 60$  mA and  $10$  Hz <  $f$  < 80 kHz
- Wide range of output voltages
- Internal current and thermal limit
- $V_{OUT}$  tolerance  $\pm 2\%$  (at 25 °C)
- Operative input voltage from:  
 $V_{OUT} + 0.5$  to 14 V (for  $V_{OUT} > 2$  V)  
 or from 2.5 V to 14 V (for  $V_{OUT} < 2$  V)

### Description

The LK112Sxx is a low dropout linear regulator with a built in electronic switch. The internal switch can be controlled by TTL or CMOS logic levels. The device is ON state when the control pin is pulled to a logic high level. An external capacitor can be used connected to the noise bypass pin to lower the output noise level to 30



$\mu$ Vrms. An internal PNP pass transistor is used to achieve a low dropout voltage.

The LK112Sxx has a very low quiescent current in ON MODE while in OFF MODE the  $I_q$  is reduced down to 100 nA max. The internal thermal shutdown circuitry limits the junction temperature to below 150 °C. The load current is internally monitored and the device will shutdown in the presence of a short circuit or overcurrent condition at the output.

**Table 1. Device summary**


| Part numbers |            |            |            |
|--------------|------------|------------|------------|
| LK112SXX13   | LK112SXX24 | LK112SXX36 | LK112SXX45 |
| LK112SXX14   | LK112SXX26 | LK112SXX37 | LK112SXX46 |
| LK112SXX18   | LK112SXX28 | LK112SXX38 | LK112SXX47 |
| LK112SXX19   | LK112SXX29 | LK112SXX39 | LK112SXX48 |
| LK112SXX20   | LK112SXX31 | LK112SXX41 | LK112SXX49 |
| LK112SXX21   | LK112SXX33 | LK112SXX42 | LK112SXX50 |
| LK112SXX22   | LK112SXX34 | LK112SXX43 |            |
| LK112SXX23   | LK112SXX35 | LK112SXX44 |            |

# Contents

|   |                                  |    |
|---|----------------------------------|----|
| 1 | Diagram .....                    | 3  |
| 2 | Pin configuration .....          | 4  |
| 3 | Maximum ratings .....            | 5  |
| 4 | Electrical characteristics ..... | 6  |
| 5 | Typical characteristics .....    | 7  |
| 6 | Package mechanical data .....    | 12 |
| 7 | Order codes .....                | 15 |
| 8 | Revision history .....           | 16 |

# 1 Diagram

Figure 1. Schematic diagram

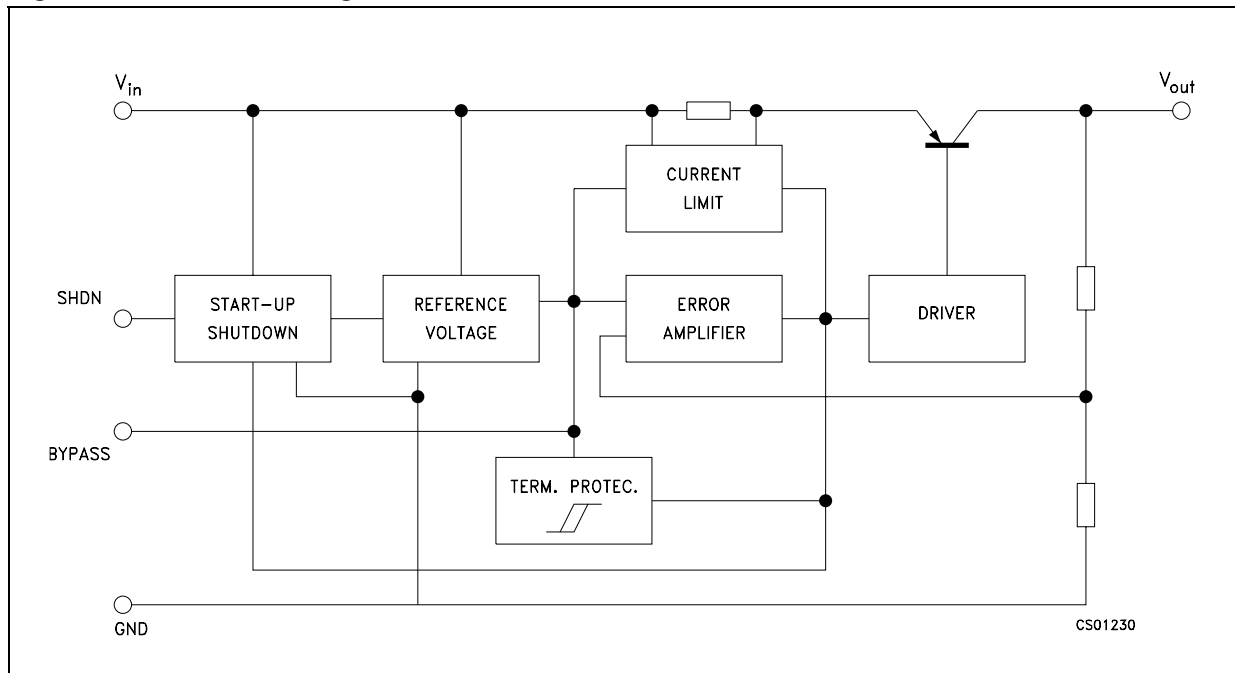

## 2 Pin configuration

Figure 2. Pin connection (top view)

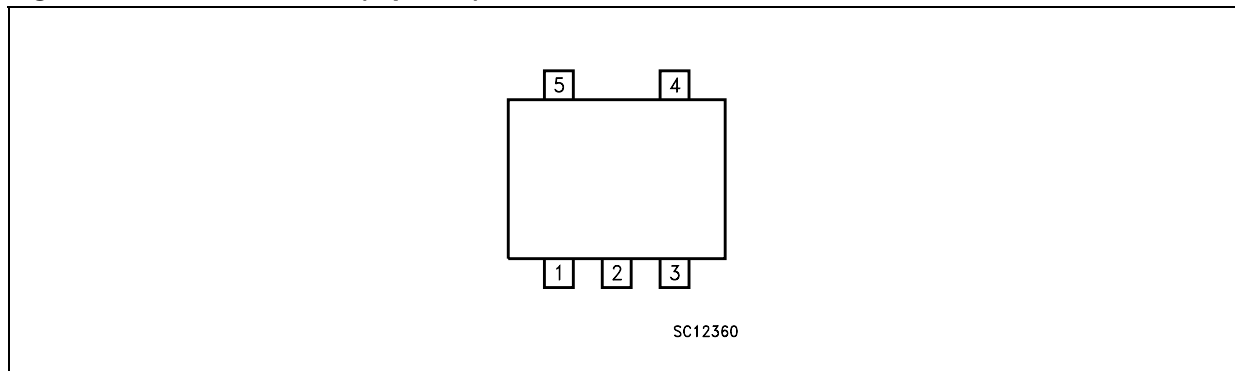


Table 2. Pin description

| Pin n° | Symbol | Note  |
|--------|--------|---|
| 1      | SHDN   | Shutdown Input: Disables the regulator when is connected to GND or to positive voltage less than 0.6 V  |
| 2      | GND    | Ground Pin: Internally connected to the die attach flag to decrease the total thermal resistance and increase the package ability to dissipate power. |
| 3      | Bypass | Bypass Pin: Bypass with 0.1 $\mu$ F to improve the $V_{REF}$ thermal noise performances.  |
| 4      | OUT    | Output port   |
| 5      | IN     | Input port  |

### 3 Maximum ratings

**Table 3. Absolute maximum ratings**

| Symbol     | Parameter                            | Value              | Unit |
|------------|--------------------------------------|--------------------|------|
| $V_I$      | DC input voltage                     | 16                 | V    |
| $V_{SHDN}$ | DC input voltage                     | 16                 | V    |
| $I_O$      | Output current                       | Internally limited |      |
| $T_{STG}$  | Storage temperature range            | -55 to 150         | °C   |
| $T_{OP}$   | Operating junction temperature range | -40 to 125         | °C   |

**Table 4. Thermal data**

| Symbol     | Parameter                           | SOT23-5L | Unit |
|------------|-------------------------------------|----------|------|
| $R_{thJC}$ | Thermal resistance junction-case    | 81       | °C/W |
| $R_{thJA}$ | Thermal resistance junction-ambient | 255      | °C/W |

## 4 Electrical characteristics

**Table 5. Electrical characteristics for LK112S** ( $T_J = 25\text{ °C}$ ,  $V_{IN} = V_{OUT} + 1\text{ V}$  <sup>(1)</sup>,  $I_{OUT} = 0\text{ mA}$ ,  $V_{SHDN} = 1.8\text{ V}$ ,  $C_I = 1\text{ }\mu\text{F}$ ,  $C_O = 2.2\text{ }\mu\text{F}$ ,  $C_{BYPASS} = 0.1\text{ }\mu\text{F}$  unless otherwise specified)


| Symbol           | Parameter                              | Test conditions  | Min.        | Typ. | Max. | Unit             |
|------------------|--|--|-------------|------|------|------------------|
| $I_d$            | Quiescent current                      | ON MODE (except $I_{SHDN}$ )   |             | 175  | 250  | $\mu\text{A}$    |
|                  |  | OFF MODE, $V_I = 8\text{V}$ , $V_{SHDN} = 0\text{V}$   |             | 0    | 0.1  | $\mu\text{A}$    |
| $V_O$            | Output voltage                         | $I_O = 30\text{mA}$  | (see table) |      |      |                  |
| $\Delta V_O$     | Line regulation                        | $V_I = V_O + 1\text{V}$ to $V_O + 6\text{V}$ , $V_O \leq 5.6\text{V}$  |             | 0.7  | 20   | mV               |
|                  |  | $V_I = V_O + 1\text{V}$ to $V_O + 6\text{V}$ , $V_O > 5.6\text{V}$   |             | 0.8  | 40   | mV               |
| $\Delta V_O$     | Load regulation                        | $I_O = 1$ to $60\text{mA}$   |             | 15   | 30   | mV               |
|                  |  | $I_O = 1$ to $200\text{mA}$  |             | 30   | 90   | mV               |
| $V_d$            | Dropout voltage                        | $I_O = 60\text{ mA}$ <sup>(2)</sup>  |             | 0.17 | 0.24 | V                |
|                  |  | $I_O = 200\text{ mA}$ <sup>(2)</sup>   |             | 0.35 | 0.5  | V                |
| $I_{SC}$         | Short circuit current                  |  | 200         |      |      | mA               |
| SVR              | Supply voltage rejection               | $V_I = V_O + 1.5\text{V}$ , $C_{BYP} = 0.1\text{ }\mu\text{F}$<br>$C_O = 10\text{ }\mu\text{F}$ , $f = 400\text{Hz}$ , $I_O = 30\text{mA}$ |             | 55   |      | dB               |
| eN               | Output noise voltage                   | B= 10Hz to 80kHz, $C_{BYP} = 0.1\text{ }\mu\text{F}$<br>$C_O = 10\text{ }\mu\text{F}$ , $V_I = V_O + 1.5\text{V}$ , $I_O = 60\text{mA}$    |             | 30   |      | $\mu\text{Vrms}$ |
| $I_{SHDN}$       | Shutdown input current                 | $V_{SHDN} = 1.8\text{V}$ , Output ON   |             | 12   | 35   | $\mu\text{A}$    |
| $V_{SHDN}$       | Shutdown input logic                   | Output ON  | 1.8         |      |      | V                |
|                  |  | Output OFF   |             |      | 0.6  |                  |
| $\Delta V_O/T_J$ | Output voltage temperature coefficient | $I_O = 10\text{mA}$  |             | 0.09 |      | mV/°C            |

1. For version with output voltage less than 2V  $V_{IN} = 2.4\text{V}$
2. Only for version with output voltage more than 2.1V


# 5 Typical characteristics

(Unless otherwise specified,  $T_J = 25\text{ }^\circ\text{C}$ ,  $C_I = 1\text{ }\mu\text{F}$ ,  $C_O = 2.2\text{ }\mu\text{F}$ ,  $C_{BYP} = 100\text{ nF}$ )


**Figure 3. Output voltage vs temperature**

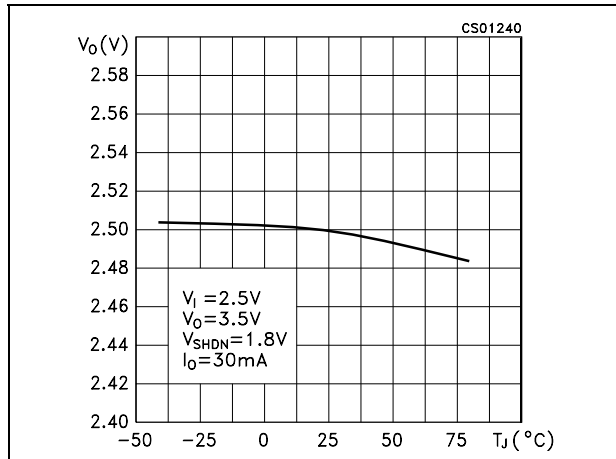


**Figure 4. Output voltage vs temperature**

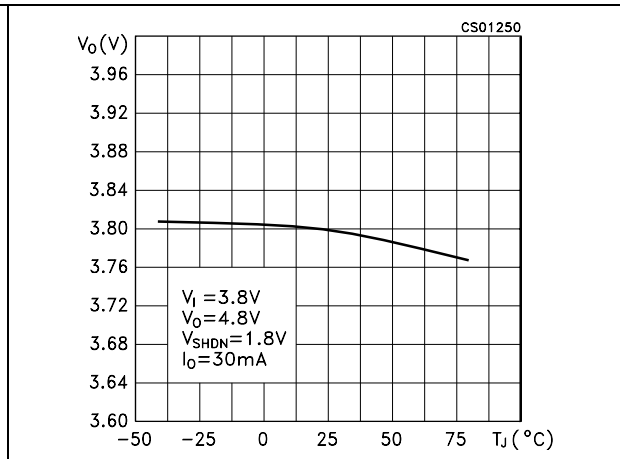


**Figure 5. Line regulation vs temperature**

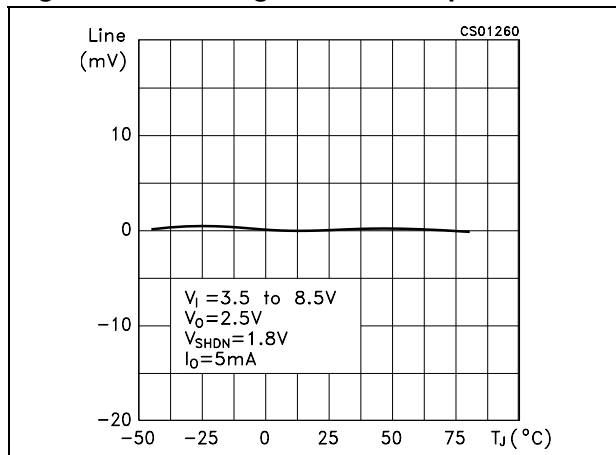

**Figure 6. Load regulation vs temperature**

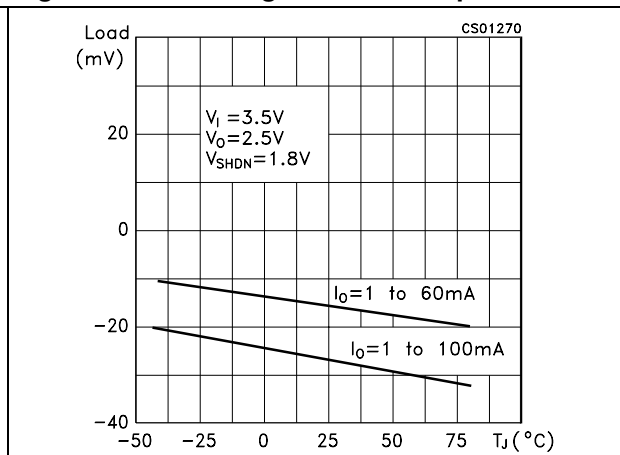

**Figure 7. Dropout voltage vs temperature**

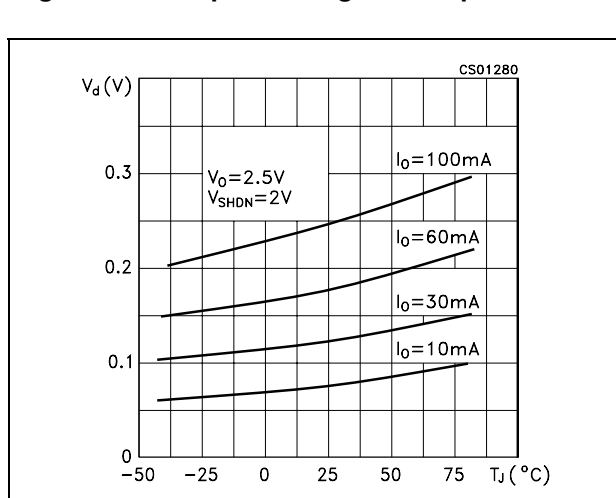

**Figure 8. Short circuit current vs dropout voltage**

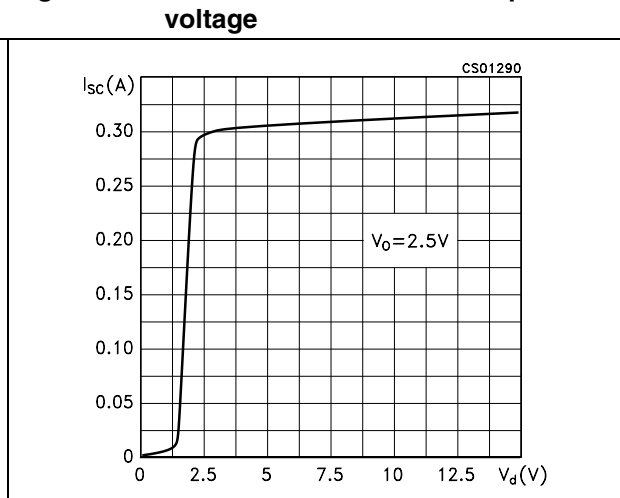


Figure 9. Output voltage vs input voltage

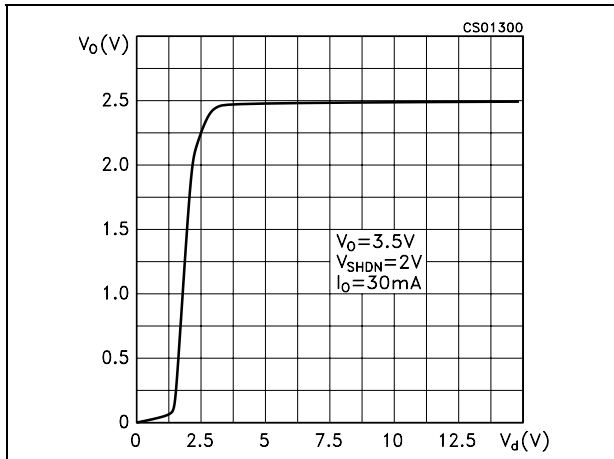


Figure 10. Shutdown voltage vs temperature

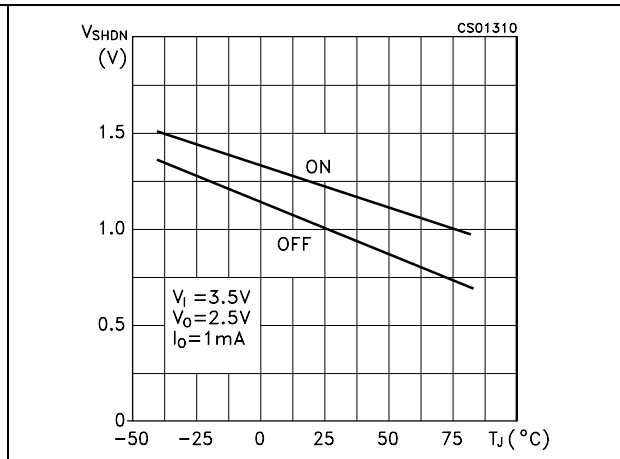


Figure 11. Shutdown current vs shutdown voltage

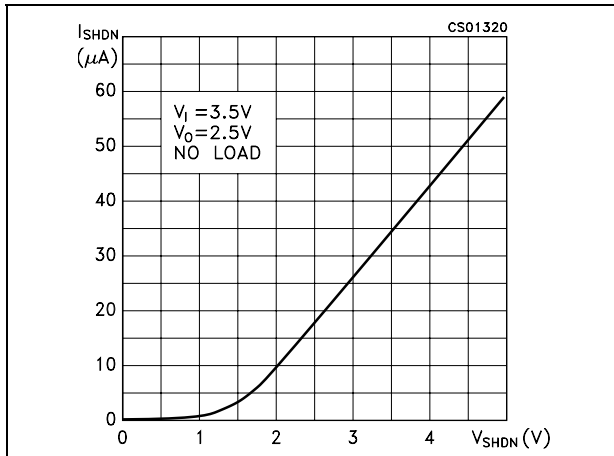


Figure 12. Supply voltage rejection vs temperature

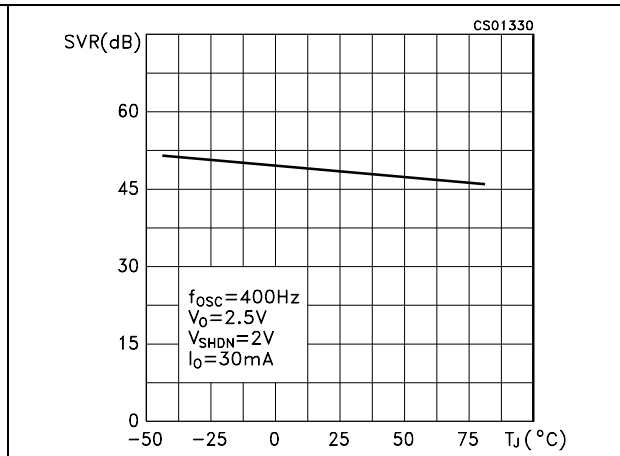


Figure 13. Supply voltage rejection vs output current

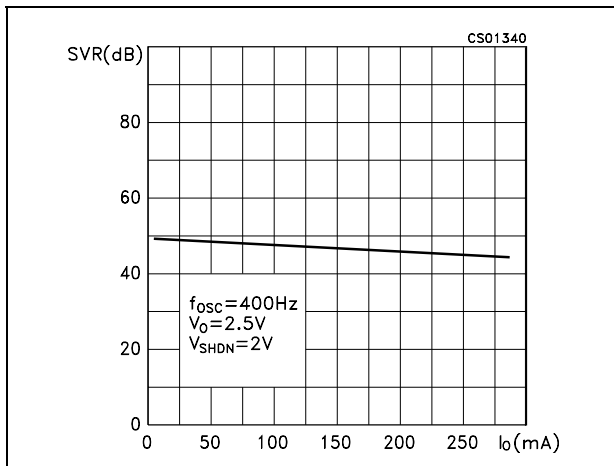


Figure 14. Supply voltage rejection vs frequency

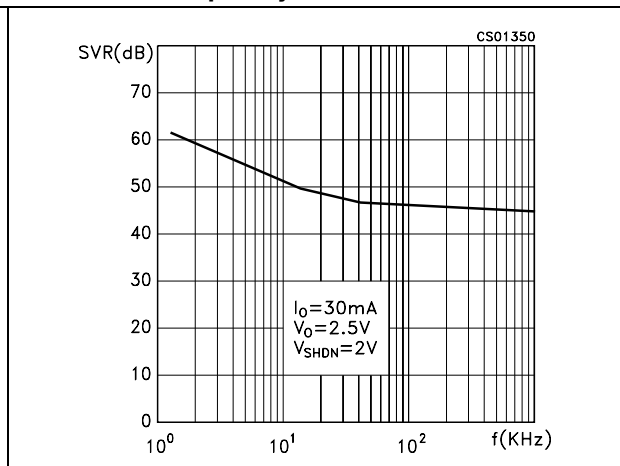




Figure 15. Supply voltage rejection vs temperature

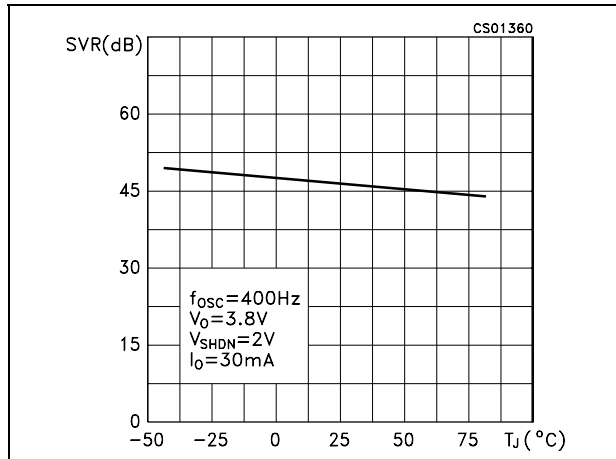


Figure 16. Quiescent current vs temperature

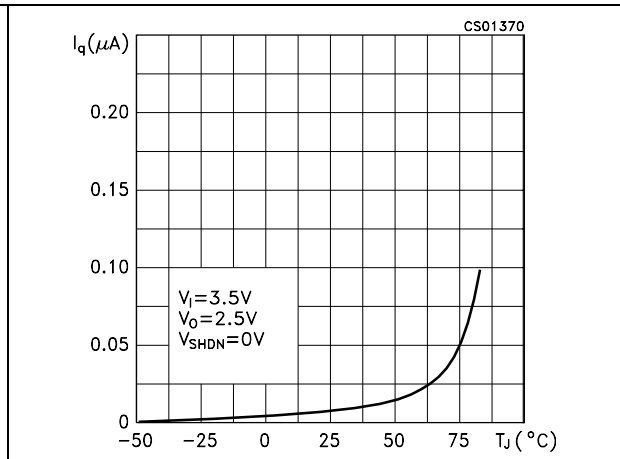


Figure 17. Quiescent current vs input voltage

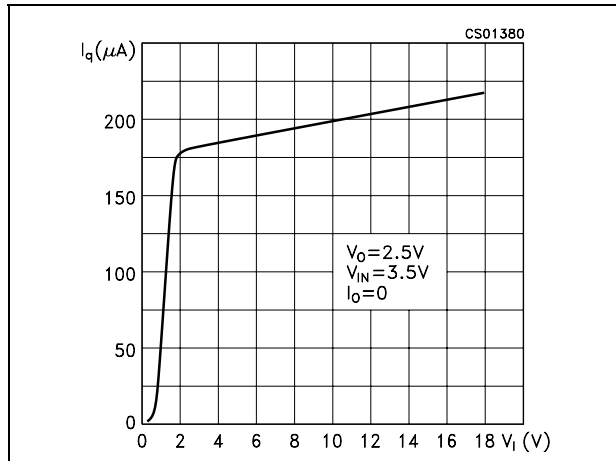


Figure 18. Quiescent current vs shutdown voltage

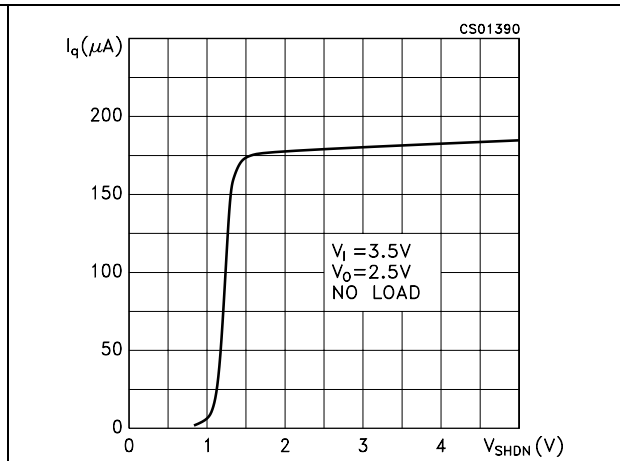


Figure 19. Quiescent current vs temperature

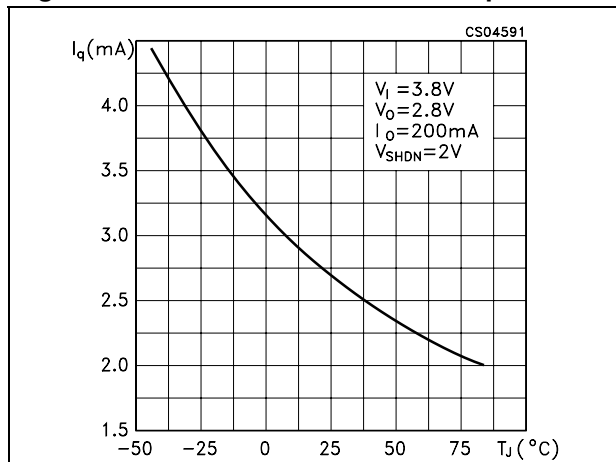


Figure 20. Reverse current vs reverse voltage

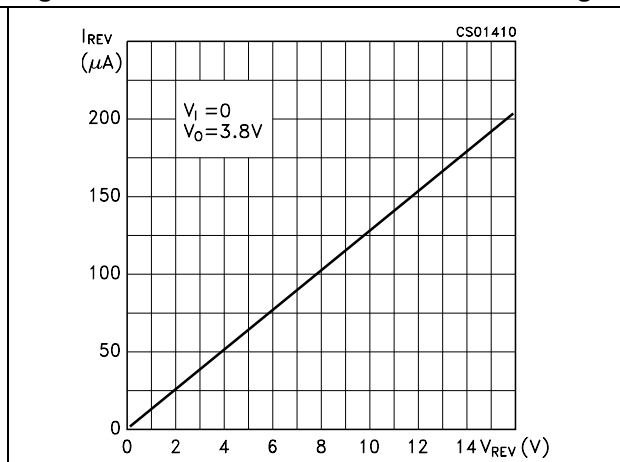


Figure 21. Stability

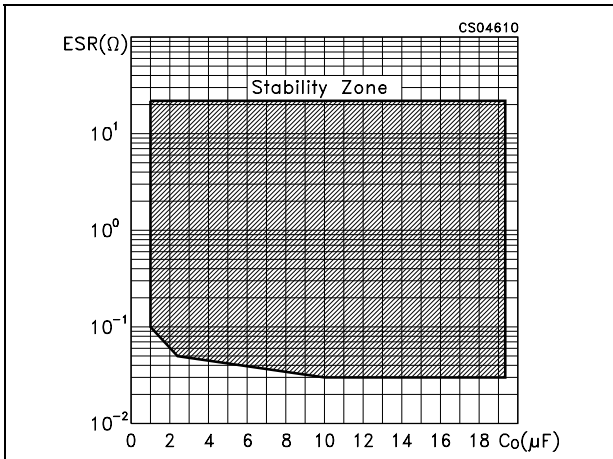


Figure 22. Spectrum noise

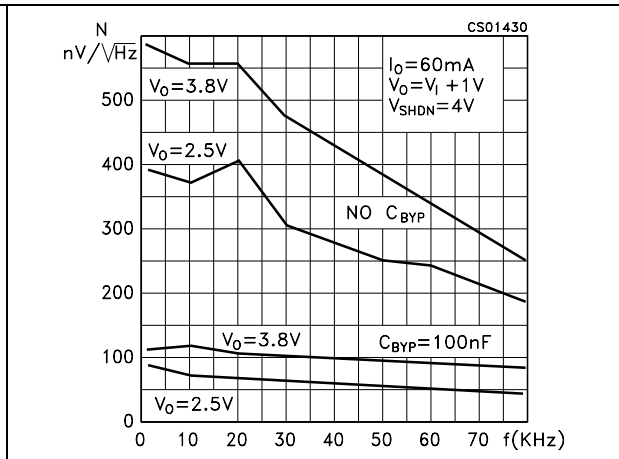


Figure 23. Start-up transient

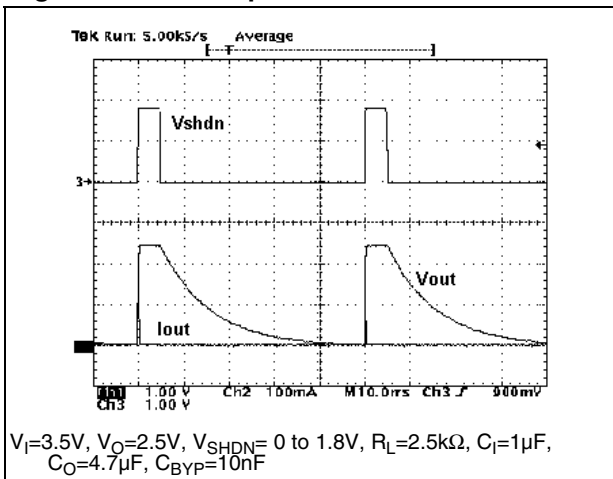


Figure 24. Start-up transient

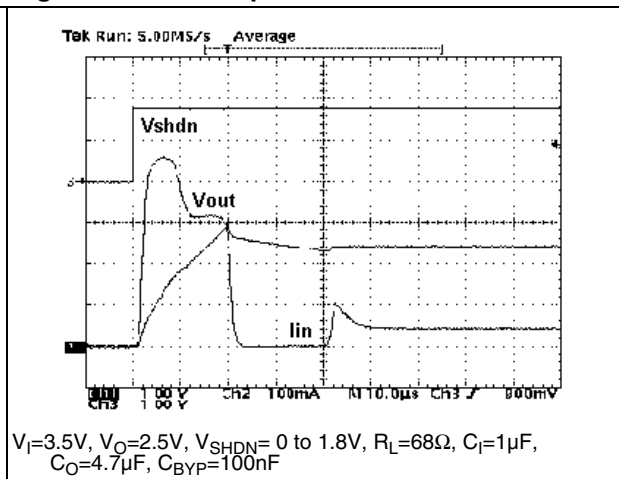


Figure 25. Line transient

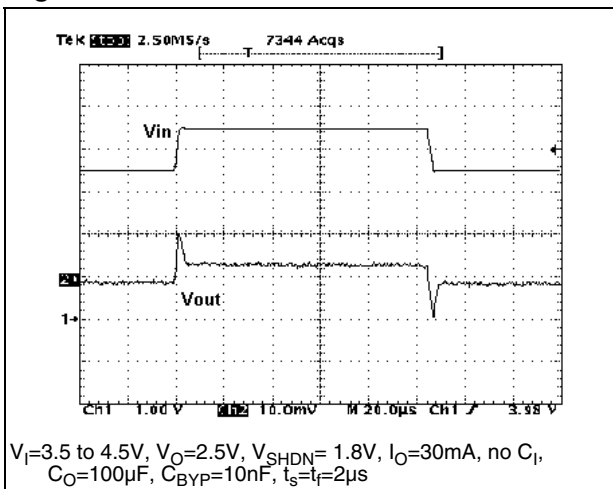


Figure 26. Line transient

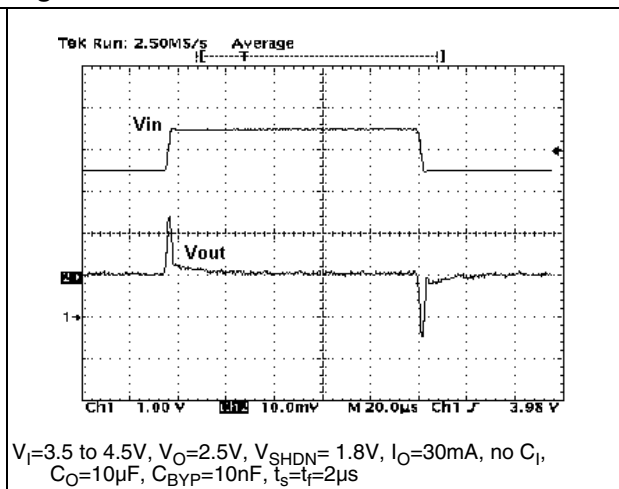


Figure 27. Line transient

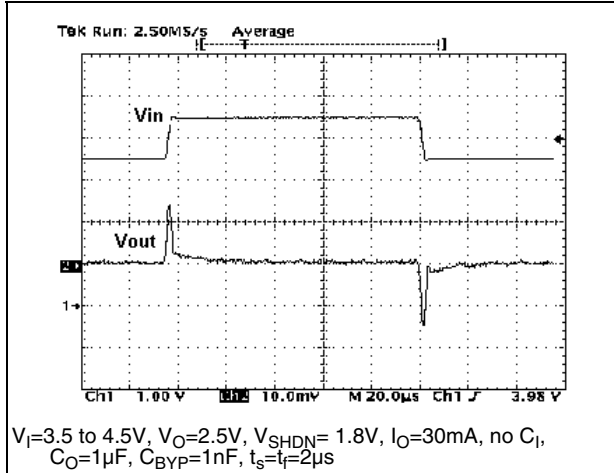


Figure 28. Load transient

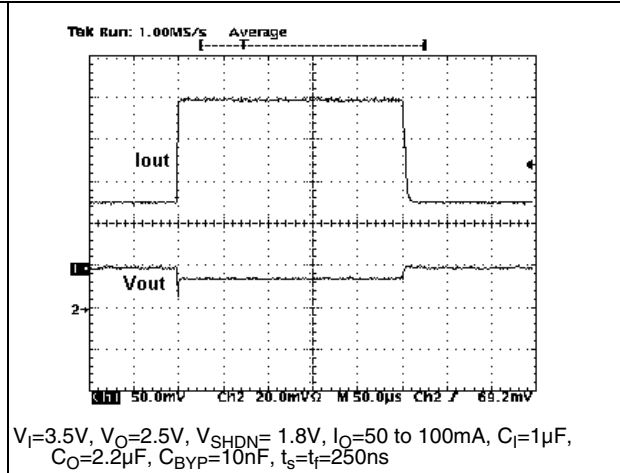


Figure 29. Load transient


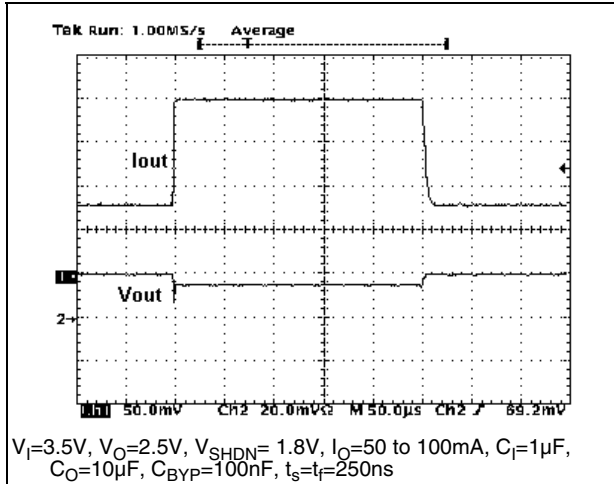


Figure 30. Load transient

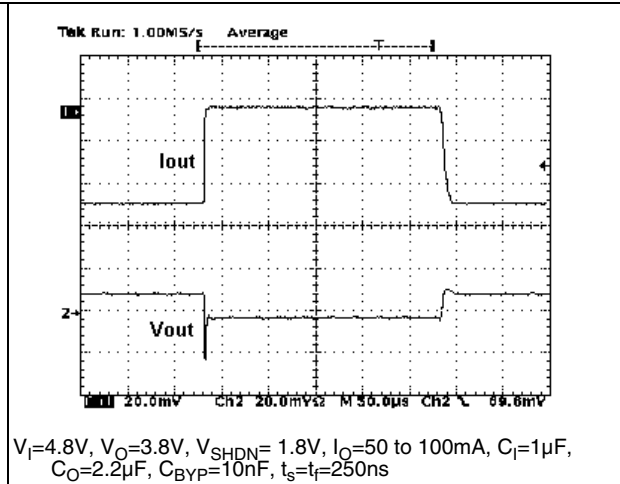


## 6 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com).


**SOT23-5L mechanical data**

| Dim. | mm.  |      |      | mils. |      |       |
|------|------|------|------|-------|------|-------|
|      | Min. | Typ. | Max. | Min.  | Typ. | Max.  |
| A    | 0.90 |      | 1.45 | 35.4  |      | 57.1  |
| A1   | 0.00 |      | 0.10 | 0.0   |      | 3.9   |
| A2   | 0.90 |      | 1.30 | 35.4  |      | 51.2  |
| b    | 0.35 |      | 0.50 | 13.7  |      | 19.7  |
| C    | 0.09 |      | 0.20 | 3.5   |      | 7.8   |
| D    | 2.80 |      | 3.00 | 110.2 |      | 118.1 |
| E    | 1.50 |      | 1.75 | 59.0  |      | 68.8  |
| e    |      | 0.95 |      |       | 37.4 |       |
| H    | 2.60 |      | 3.00 | 102.3 |      | 118.1 |
| L    | 0.10 |      | 0.60 | 3.9   |      | 23.6  |

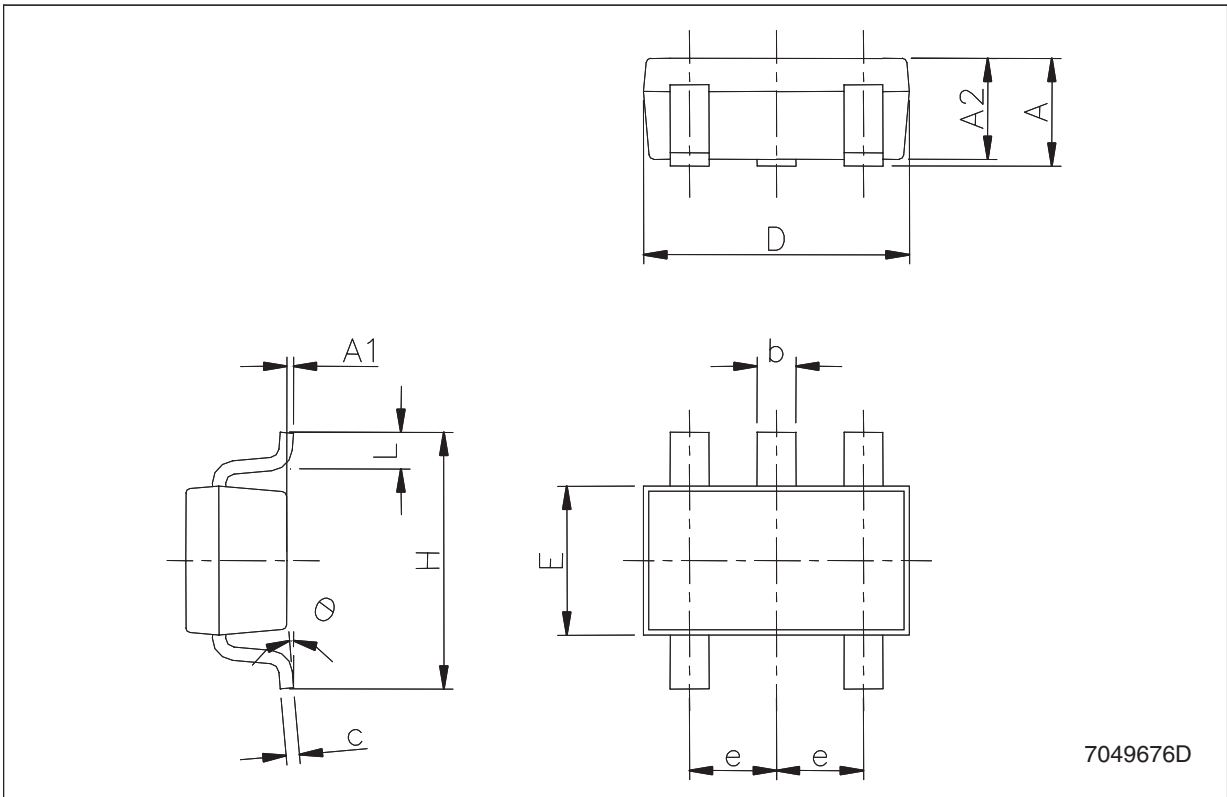

**Tape & reel SOT23-xL mechanical data**

| Dim. | mm.  |      |      | inch. |       |       |
|------|------|------|------|-------|-------|-------|
|      | Min. | Typ. | Max. | Min.  | Typ.  | Max.  |
| A    |      |      | 180  |       |       | 7.086 |
| C    | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519 |
| D    | 20.2 |      |      | 0.795 |       |       |
| N    | 60   |      |      | 2.362 |       |       |
| T    |      |      | 14.4 |       |       | 0.567 |
| Ao   | 3.13 | 3.23 | 3.33 | 0.123 | 0.127 | 0.131 |
| Bo   | 3.07 | 3.17 | 3.27 | 0.120 | 0.124 | 0.128 |
| Ko   | 1.27 | 1.37 | 1.47 | 0.050 | 0.054 | 0.058 |
| Po   | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |
| P    | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |

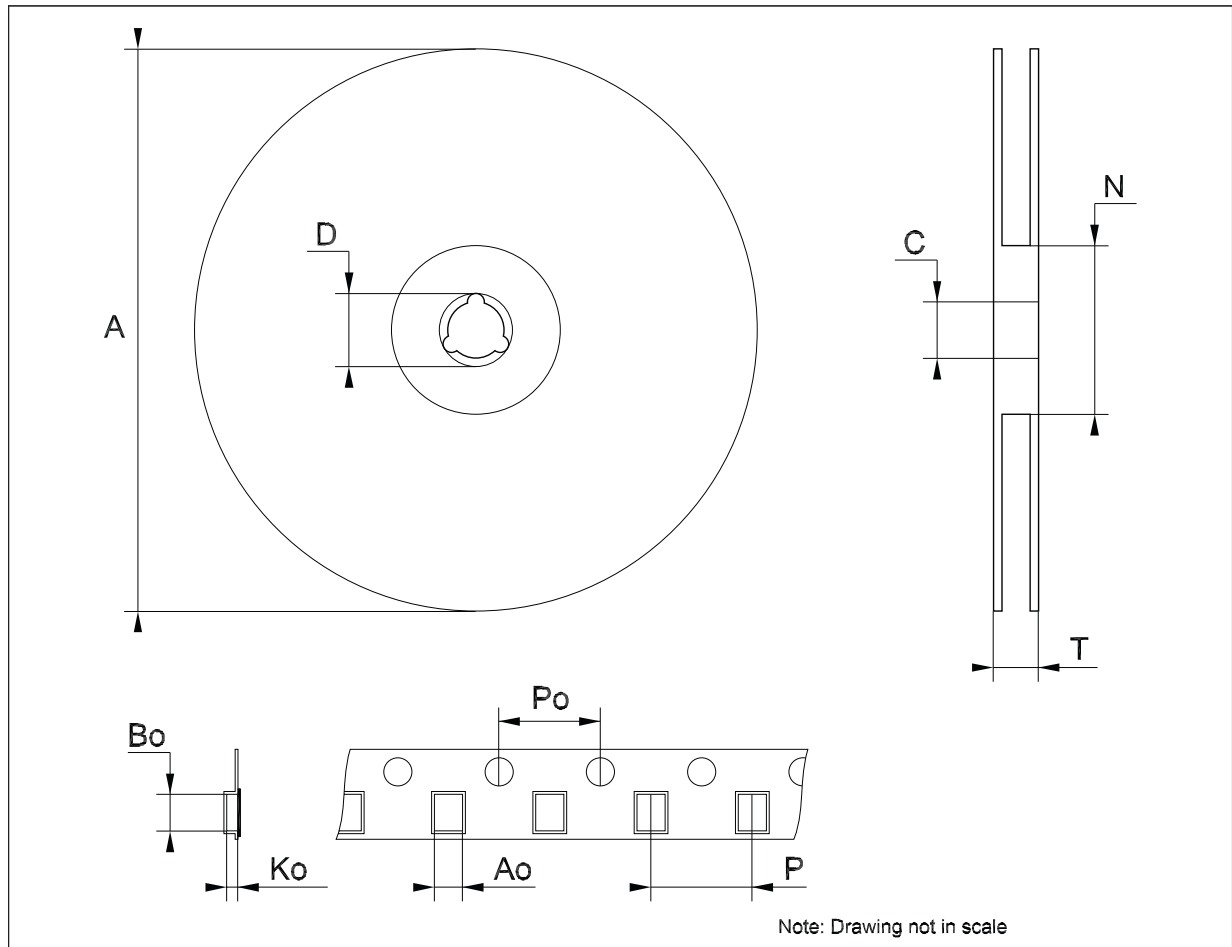

## 7 Order codes

**Table 6. Order codes**

| Part number                | Output voltage | V <sub>OUT</sub> Min. | V <sub>OUT</sub> Max. | Test voltage |
|----------------------------|----------------|-----------------------|-----------------------|--------------|
| LK112SM13TR <sup>(1)</sup> | 1.3V           | 1.24V                 | 1.36V                 | 2.4V         |
| LK112SM14TR <sup>(1)</sup> | 1.4V           | 1.34V                 | 1.46V                 | 2.4V         |
| LK112SM18TR                | 1.8V           | 1.74V                 | 1.86V                 | 2.4V         |
| LK112SM19TR <sup>(1)</sup> | 1.9V           | 1.84V                 | 1.96V                 | 2.4V         |
| LK112SM20TR <sup>(1)</sup> | 2.0V           | 1.94V                 | 2.06V                 | 3.0V         |
| LK112SM21TR <sup>(1)</sup> | 2.1V           | 2.04V                 | 2.16V                 | 3.1V         |
| LK112SM22TR <sup>(1)</sup> | 2.2V           | 2.14V                 | 2.26V                 | 3.2V         |
| LK112SM23TR <sup>(1)</sup> | 2.3V           | 2.24V                 | 2.36V                 | 3.3V         |
| LK112SM24TR <sup>(1)</sup> | 2.4V           | 2.34V                 | 2.46V                 | 3.4V         |
| LK112SM26TR <sup>(1)</sup> | 2.6V           | 2.54V                 | 2.66V                 | 3.6V         |
| LK112SM28TR                | 2.8V           | 2.74V                 | 2.86V                 | 3.8V         |
| LK112SM29TR <sup>(1)</sup> | 2.9V           | 2.84V                 | 2.96V                 | 3.9V         |
| LK112SM31TR <sup>(1)</sup> | 3.1V           | 3.04V                 | 3.16V                 | 4.1V         |
| LK112SM33TR                | 3.3V           | 3.24V                 | 3.36V                 | 4.3V         |
| LK112SM34TR <sup>(1)</sup> | 3.4V           | 3.335V                | 3.465V                | 4.4V         |
| LK112SM35TR <sup>(1)</sup> | 3.5V           | 3.435V                | 3.565V                | 4.5V         |
| LK112SM36TR <sup>(1)</sup> | 3.6V           | 3.535V                | 3.655V                | 4.6V         |
| LK112SM37TR <sup>(1)</sup> | 3.7V           | 3.630V                | 3.770V                | 4.7V         |
| LK112SM38TR <sup>(1)</sup> | 3.8V           | 3.725V                | 3.875V                | 4.8V         |
| LK112SM39TR <sup>(1)</sup> | 3.9V           | 3.825V                | 3.975V                | 4.9V         |
| LK112SM41TR <sup>(1)</sup> | 4.1V           | 4.020V                | 4.180V                | 5.1V         |
| LK112SM42TR <sup>(1)</sup> | 4.2V           | 4.120V                | 4.280V                | 5.2V         |
| LK112SM43TR <sup>(1)</sup> | 4.3V           | 4.215V                | 4.385V                | 5.3V         |
| LK112SM44TR <sup>(1)</sup> | 4.4V           | 4.315V                | 4.485V                | 5.4V         |
| LK112SM45TR <sup>(1)</sup> | 4.5V           | 4.410V                | 4.590V                | 5.5V         |
| LK112SM46TR <sup>(1)</sup> | 4.6V           | 4.510V                | 4.690V                | 5.6V         |
| LK112SM47TR <sup>(1)</sup> | 4.7V           | 4.605V                | 4.795V                | 5.7V         |
| LK112SM48TR <sup>(1)</sup> | 4.8V           | 4.705V                | 4.895V                | 5.8V         |
| LK112SM49TR <sup>(1)</sup> | 4.9V           | 4.800V                | 5.000V                | 5.9V         |
| LK112SM50TR                | 5.0V           | 4.900V                | 5.100V                | 6.0V         |

1. Available on request.

## 8 Revision history

**Table 7. Document revision history**

| Date        | Revision | Changes  |
|-------------|----------|--|
| 31-Aug-2004 | 3        | Mistake on fig. 19.  |
| 31-Jan-2005 | 4        | Change maturity code.  |
| 12-Jun-2006 | 5        | Order codes updated.   |
| 17-Oct-2006 | 6        | The T <sub>OP</sub> value on table 2 updated.  |
| 20-Jul-2007 | 7        | Add <a href="#">Table 1</a> in cover page.   |
| 21-Sep-2007 | 8        | Features updated.  |
| 11-Dec-2007 | 9        | Modified: <a href="#">Table 6</a> .  |
| 12-Feb-2008 | 10       | Modified: <a href="#">Table 6 on page 15</a> .                                       |
| 10-Jul-2008 | 11       | Modified: <a href="#">Table 1 on page 1</a> and <a href="#">Table 6 on page 15</a> . |



**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)