





10 Year Mixed Flowing Gas (MFG)  
Call Samtec for maximum cycles

(1,27mm) .050"

FTSH SERIES



FTSH-125-01-L-DV-EJ



FTSH-120-02-F-DV

FTSH-110-01-L-DV

# SMT MICRO HEADER

## SPECIFICATIONS

For complete specifications and recommended PCB layouts see [www.samtec.com?FTSH](http://www.samtec.com?FTSH)

### Insulator Material:

Black Liquid Crystal Polymer

### Terminal Material:

Phosphor Bronze

### Plating:

Sn or Au over 50µ" (1,27µm) Ni

### Current Rating:

1.75A @ 80°C ambient

### Operating Temp Range:

-55°C to +125°C

### RoHS Compliant:

Yes

### Processing:

#### Max Processing Temp:

230°C for 60 seconds, or 260°C for 20 seconds 3x

#### Lead-Free Solderable:

Yes

#### SMT Lead Coplanarity:

-MT & -DV Tail Option: (0,10mm) .004" max (02-25)

-MT & -DH Tail Option: (0,15mm) .006" max (26-50)




Mates with:  
FFSD, CLP, FLE,  
SFMC, SFMH

## APPLICATIONS




HORIZONTAL

## OPTIONS

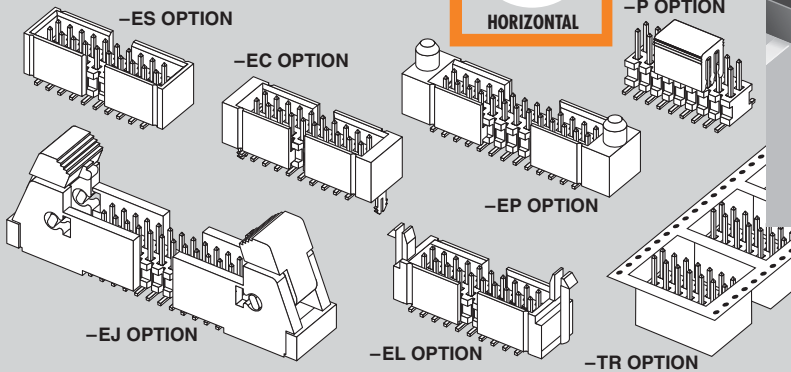

## ALSO AVAILABLE

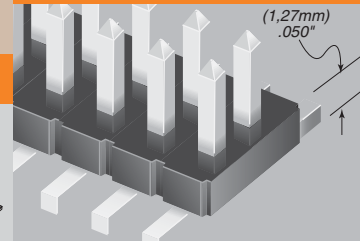

Ultra-low profile option available.  
End Shrouds available.  
Call for FTS Series specifications.

## APPLICATION SPECIFIC OPTION

Molded Pick & Place pads, latches and straddle mount leads available.  
Call Samtec.

1,27mm FTSH/CLP	Rated @ -3dB Insertion Loss
5,13mm Stack Height	
Single-Ended Signaling	7.0 GHz / 14 Gbps
Differential Pair Signaling	8.5 GHz / 17 Gbps
Performance data for other stack heights and complete test data available at <a href="http://www.samtec.com?FTSH">www.samtec.com?FTSH</a> or contact sig@samtec.com.	


FTSH

1


NO. PINS PER ROW

LEAD STYLE

02 thru 50

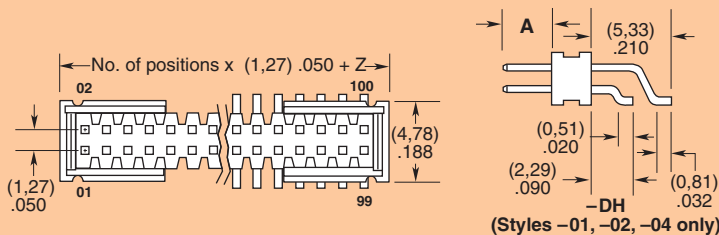

OPTION	Z
-ES	(2,57) .101
-EJ	(15,77) .621
-EC	(3,33) .131
-EP	(5,87) .231
-EL	(6,53) .257

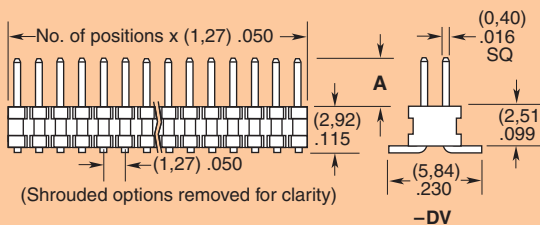

- 01**  
= (3,05) .120" Post  
(Mates with FFSD, FLE, CLP-DH)
- 02**  
= (1,91) .075" Post  
(Mates with FLE)
- 03**  
= (1,65) .065" Post  
(Mates with CLP-D)
- 04**  
= (3,81) .150" Post  
(Mates with SFMC, SFMH)
- 05**  
= (4,32) .170" Post  
(Mates with CLP-BE)



LEAD STYLE	A
-01	(3,05) .120
-02	(1,91) .075
-03	(1,65) .065
-04	(3,81) .150
-05	(4,32) .170

Note: Some sizes, styles and options are non-standard, non-returnable.

Note: See SFM/TFM for positive alignment feature.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

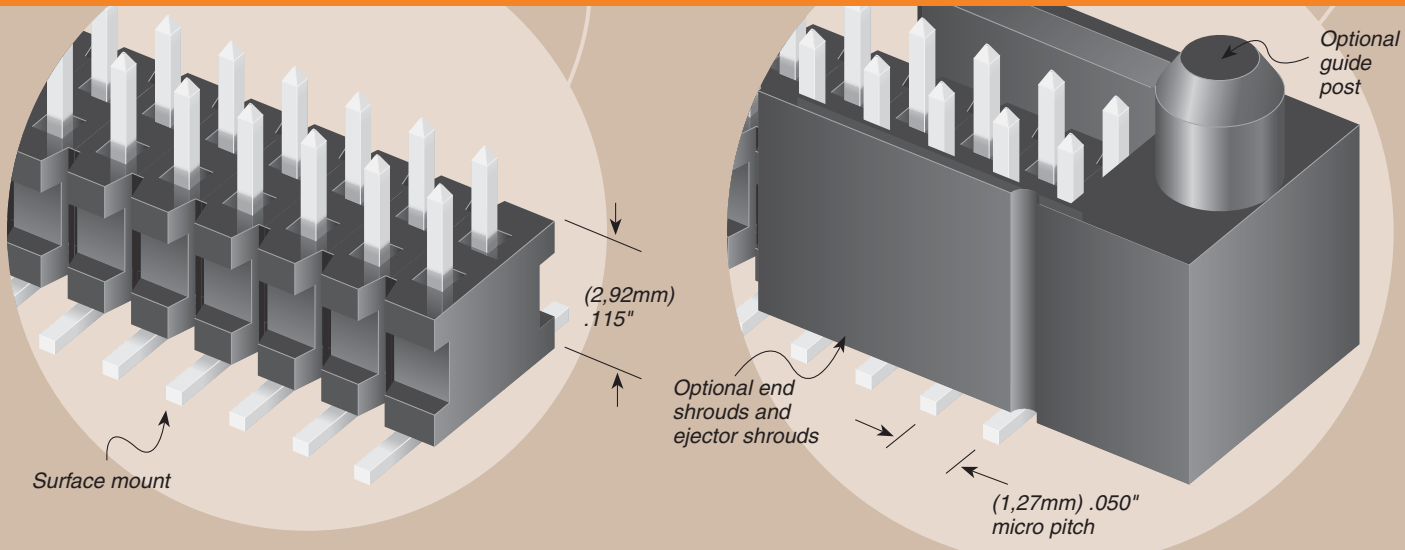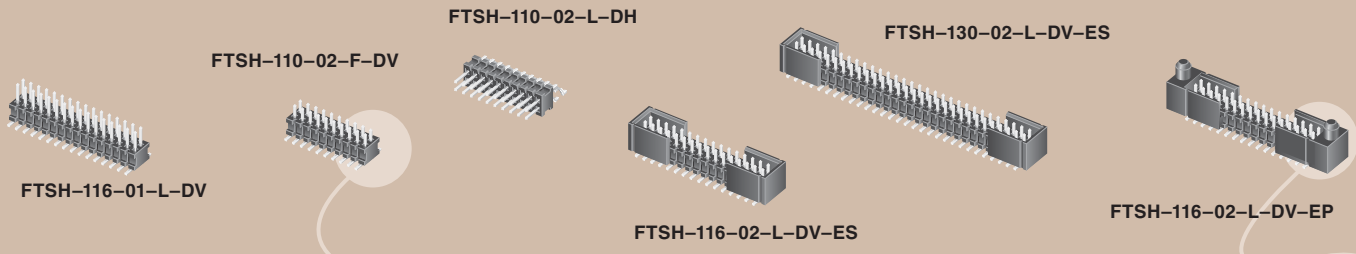

**PLATING OPTION**

- F**  
= Gold flash on post, Matte Tin on tail
- L**  
= 10µ" (0,25µm) Gold on post, Matte Tin on tail

**TAIL OPTION**


- DV**  
= Double Vertical
- DH**  
= Double Horizontal (Styles -01, -02 & -04 only)
- MT**  
= Mixed Technology (Styles -01, -02 & -04 only)

**FLEX SHROUD OPTIONS**

- (Style -02 & -03 only, -DH not available)  
9 pins/row minimum (Other positions available. Call Samtec.)
- ES**  
= End Shroud
- EC**  
= End Shroud with Locking Clip
- EP**  
= End Shroud with Guide Post
- EL**  
= End Shroud with Board Lock (Boards are positively locked and cannot be unmated)
- EJ**  
= Ejector Shroud (Style -01 only)  
-DH & -MT not available  
10 pins/row minimum  
25 pins/row maximum

**OTHER OPTIONS**

- K**  
= Keying Shroud (For mating with FFSD Styles -01 only, 05, 08, 10, 13, 17, 20 & 25 pins/row only, 13, 17, 20 & 25 only with shrouds) (-DV only)
- A**  
= Alignment Pin (-DV 3 positions min.) (-DH 5 positions min.) (Metal or plastic at Samtec discretion)
- C**  
= (4,00mm) .157" DIA Polyimide film Pick & Place Pad (-DH only)
- P**  
= Pick & Place Pad (-DV 4 positions min.) (-DH & -MT not available)
- TR**  
= Tape & Reel Packaging (Flex Shroud options not available except -ES & -EJ)

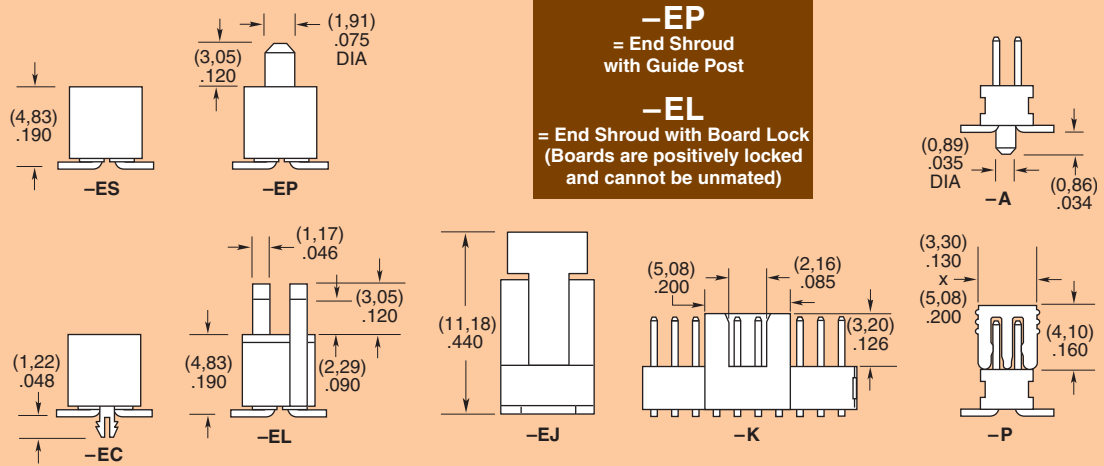

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329 SAMTEC UK • Tel: 44 01236 739292  
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292  
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103766  
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 SAMTEC ANZ • Tel: 613 9512 7747