


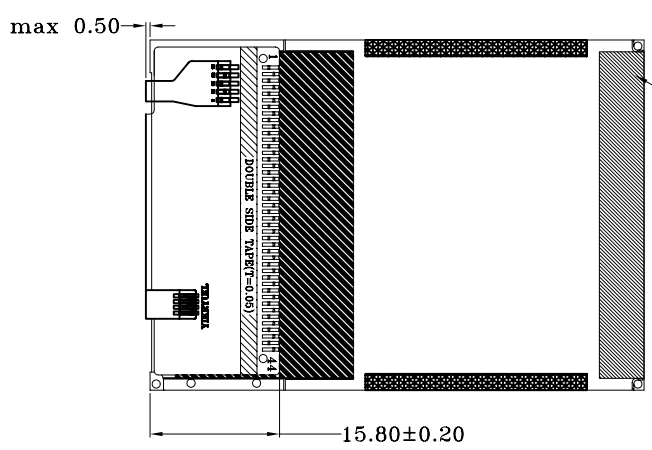
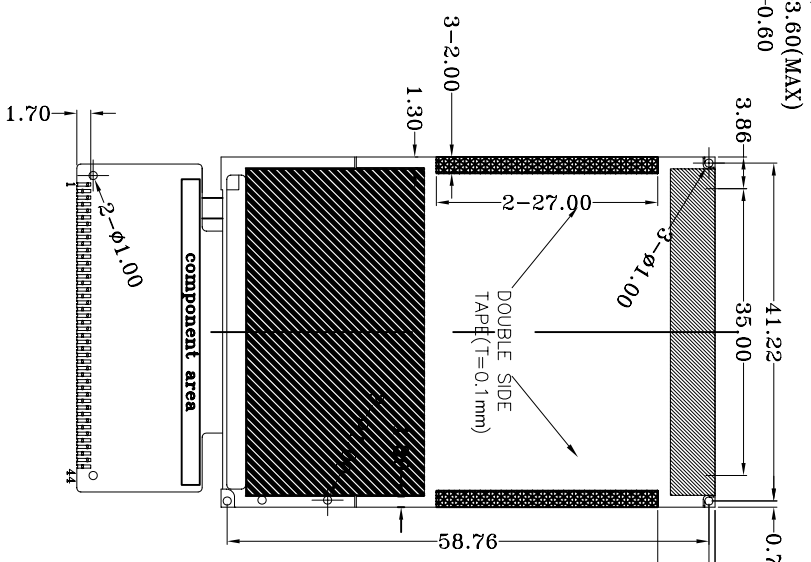


REV ??	DESCRIPTION ??	DATE ??
A00	First issue	2009-05-29

PIN	FUNCTION	SYMBOL
1	GND	
2	Y-	
3	X-	
4	Y+	
5	X+	
6	GND	
7	IM0	
8	IM1	
9	IM2	
10	IM3	
11	NC	
12	RESET	
13	D17	
14	D16	
15	D15	
16	D14	
17	D13	
18	D12	
19	D11	
20	D10	
21	D9	
22	D8	
23	D7	
24	D6	
25	D5	
26	D4	
27	D3	
28	D2	
29	D1	
30	D0	
31	RD	
32	WR	
33	RS	
34	CS	
35	GND	
36	IOVCC	
37	VCC	
38	VCC	
39	LEDK4	
40	LEDK3	
41	LEDK2	
42	LEDK1	
43	LEDA	
44	GND	

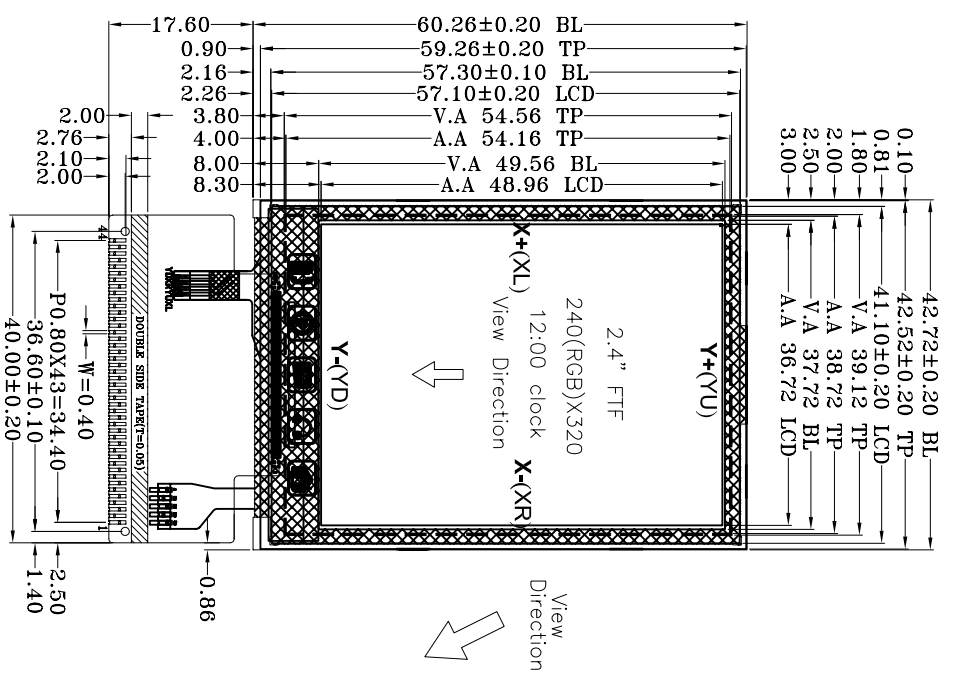

Specification:

- (1). Viewing angle: 12 0'clock
- (2). Display mode: 262K TFT/Normally White/Transmissive
- (3). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- (4). IC: ILI9325
- (5). Backlight: 4 chip White LED, in Parallel Vr: 3.2 V If: 80 mA
- (6). Dimensions with mark "*" are important, with mark "()" are referenced
- (7). Request ROHS

SCALE:	FIT	
SHEET:	1	OF 1
GENERAL TOL:	± 0.3	
UNIT:	mm	

WIN STAC 威世达
WINSTAC DISPLAY LIMITED
微视显示器材科技 (深圳) 有限公司

APPROVALS	DATE	MODEL NUMBER	PROJECTION	PART NO.:
APP:		TGG000240TP04-24		C/D
CHK:				LCM-TGG000240TP04-24
DWN:		DO NOT SCALE THIS DRAWING.		