



产品规格(镍氢电池) Specification of product(nickel-hydrogen battery)




镍氢圆柱型电池规格表  
Specification chart of cylindrical nickel-hydrogen battery


系列 Series	型号 Model	额定容量 Rated capacity (mAh)	尺寸 Size		标准充电 Standard charge		快速充电 Fast charge		标称电压 Nominal voltage (V)	单体重量 Monomer weight (g)
			直径 Diameter (mm)	高度 Altitude (mm)	电流 Electric current (mA)	时间 Time (h)	电流 Electric current (mA)	时间 Time (h)		
AAA	LPH29AAA300	300	10.5	29.0	30	16	300	- $\Delta V = 5-5-10\text{mv/只}$ 时,终止充电。  - $\Delta V = 5-5-10\text{mv/Whe}$ n only, the termination charges	1.20	8.2
	LPH44AAA300	300	10.5	44.0	30	16	300			8.6
	LPH44AAA500	500	10.5	44.0	50	16	500			12.0
	LPH44AAA600	600	10.5	44.0	60	16	600			13.0
	LPH44AAA700	700	10.5	44.0	70	16	700			14.0
AA	LPH29AA600	600	14.5	29.0	60	16	600			13.2
	LPH49AA1200	1200	14.5	49.0	120	16	1200			23.1
	LPH49AA1300	1300	14.5	49.0	130	16	1300			23.8
	LPH49AA1500	1500	14.5	49.0	150	16	1500			25.8
	LPH49AA1600	1600	14.5	49.0	160	16	1600			26.5
	LPH49AA1800	1800	14.5	49.0	180	16	1800			29.5
	LPH49AA2000	2000	14.5	49.0	200	16	1800			31.0
	LPH51AAJ1200	1200	14.5	51.0	120	16	1200			23.1
	LPH51AAJ1300	1300	14.5	51.0	130	16	1300			23.8
	LPH51AAJ1500	1500	14.5	51.0	150	16	1500			25.8
	LPH51AAJ1600	1600	14.5	51.0	160	16	1600			26.5
	LPH51AAJ1800	1800	14.5	51.0	180	16	1800			29.5
LPH51AAJ2000	2000	14.5	51.0	200	16	1800	31.0			
A	LPH29A1000	1000	17.0	29.0	100	16	1000			19.0
SC	LPH43SC2800	2800	23.0	43.0	280	16	1800			56.0
	LPH43SC3000	3000	23.0	43.0	300	16	1800	57.0		
	LPH43SC3200	3200	23.0	43.0	320	16	1800	57.5		
	LPH43SC3300	3300	23.0	43.0	330	16	1800	58.2		
C	LPH50C3500	3500	25.5	50.0	350	16	1800	70.0		
	LPH50C4000	4000	25.5	50.0	400	16	1800	78.0		
D	LPH61D8000	8000	33.0	61.0	800	16	1800	160.0		

典型特性曲线  
Typical characteristic curve


Standard Charge 标准充电

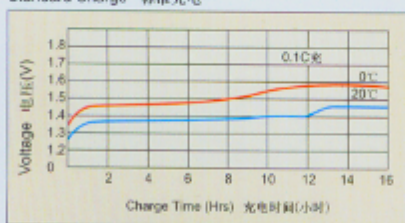


Fast Charge 快速充电

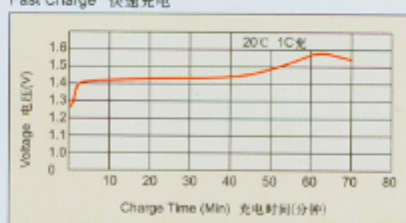


Discharge(at high rate) 高倍率放电

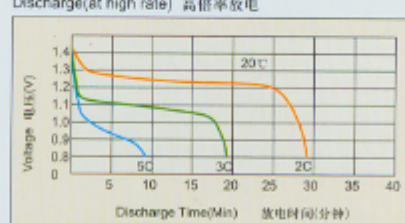

Standard Discharge 标准放电

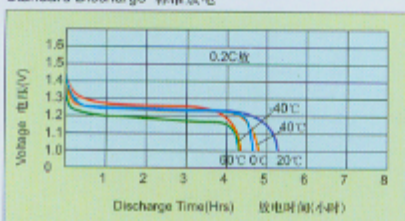

Discharge(at high rate) 高倍率放电

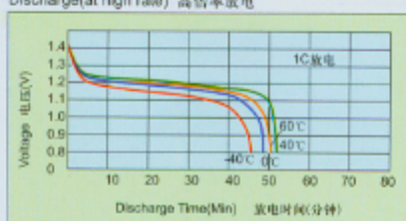

Charge Retention 荷电保持

